

#2

jc996 U.S. PRO  
09/862860  
05/22/01

)

)

)

) Group Art Unit No.

)

)

)

)

)

) I hereby certify that this correspondence is being deposited with the United States Postal Service as first class mail in an envelope addressed to "Commissioner for Patents, Washington, D.C. 20231, on May 22, 2001  
Name of person signing: Barbara Balsamo

**Signature**


Barbican Balsamo

Honorable Commissioner of  
Patents and Trademarks  
Washington, D.C. 20231

Under the International Convention, for the purposes of priority, applicant claims the benefit of UK Application No. 0014523.5, filed June 15, 2000.

May 22, 2001

Respectfully Submitted,

  
William M. Lee, Jr.  
Registration No. 26 035

Registration No. 26,935  
Lee, Mann, Smith, McWilliams,  
Sweeney & Ohlson  
P.O. Box 2786  
Chicago, Illinois 60690-2786  
(312) 368-1300  
(312) 368-0034 (fax)

**THIS PAGE BLANK (USPTO)**



USA



INVESTOR IN PEOPLE

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ




I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

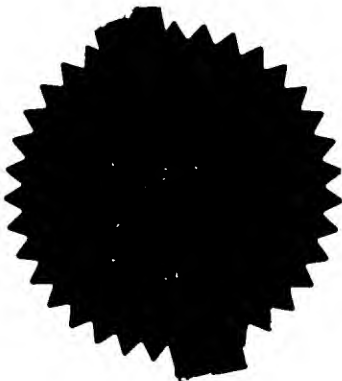

Signed

Dated 2 May 2001

**THIS PAGE BLANK (USPTO)**

THE PATENT OFFICE

15 JUN 2000

The  
Patent  
Office

# Statement of inventorship and of right to grant of a patent

The Patent Office

Cardiff Road  
Newport  
Gwent NP9 1RH

1. Your reference

C1429

2. Patent application number  
(if you know it)

0014523.5

3. Full name of the or of each applicant

INTERNATIONAL COMPUTERS LIMITED

4. Title of the invention

COMPUTER SYSTEMS, IN PARTICULAR VIRTUAL PRIVATE NETWORKS

5. State how the applicant(s) derived the right  
from the inventor(s) to be granted a patent.

BY REASON OF EMPLOYMENT

6. How many, if any, additional Patents Forms  
7/77 are attached to this form?  
(see note (c))

7. I/We believe that the person(s) named over the page (and on  
any extra copies of this form) is/are the inventor(s) of the invention  
which the above patent application relates to.

Signature

*S.M. Dupuy*

Date

15 June 2000

8. Name and daytime telephone number of  
person to contact in the United Kingdom

S.M. Dupuy  
01438 786261

## Notes

- a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- b) Write your answers in capital letters using black ink or you may type them.
- c) If there are more than three inventors, please write the names and addresses of the other inventors on the back of another Patents Form 7/77 and attach it to this form.
- d) When an application does not declare any priority, or declares priority from an earlier UK application, you must provide enough copies of this form so that the Patent Office can send one to each inventor who is not an applicant.
- e) Once you have filled in the form you must remember to sign and date it.



Enter the full names, addresses and postcodes of the inventors in the boxes and underline the surnames

Mark Joseph Stefan Jaros  
7 Farler's End  
Nailsea  
Bristol  
BS48 4PG

Patents ADP number (if you know it):

7919400001


Patents ADP number (if you know it):

**Reminder**

Have you signed the form?

Patents ADP number (if you know it):

Patents Act 1977  
(c 16)



15JUN00 E545047-1 D02759  
P01/7700 0.00-0014523.5

The Patent Office

Cardiff Road  
Newport  
Gwent NP9 1RH

# Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

1. Your reference C1429

2. Patent application number 0014523.5  
(The Patent Office will fill in this part)

3. Full name, address and postcode of the or of each applicant (underline all surnames)  
INTERNATIONAL COMPUTERS LIMITED  
26 Finsbury Square, London EC2A 1SL

Patents ADP number (if you know it)

28258 008

If the applicant is a corporate body, give the country/state of its incorporation

ENGLAND

4. Title of the invention

COMPUTER SYSTEMS, IN PARTICULAR VIRTUAL PRIVATE NETWORKS

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

S.M. Dupuy  
Intellectual Property Department  
International Computers Limited  
Stevenage  
Herts  
SG1 2DY

Patents ADP number (if you know it)

64909 16001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number	Country	Priority application number (if you know it)	Date of filing (day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application	Number of earlier application	Date of filing (day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

- a) any applicant named in part 3 is not an inventor, or
- b) there is an inventor who is not named as an applicant, or
- c) any named applicant is a corporate body.

See note (d))

YES

## Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description 9

Claim(s) 4

Abstract 1

Drawing(s) 2 + 2



10. If you are also filing any of the following, state how many against each item.

Priority documents -

Translations of priority documents -

Statement of inventorship and right to grant of a patent (Patents Form 7/77) 2


Request for preliminary examination and search (Patents Form 9/77) 1

Request for substantive examination (Patents Form 10/77) -

Any other documents Fee Sheet  
(please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature



Date 13 June 2000

12. Name and daytime telephone number of person to contact in the United Kingdom

S.M. Dupuy  
01438 786261

### Warning

*After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.*

### Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.*
- Write your answers in capital letters using black ink or you may type them.*
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.*
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.*
- Once you have filled in the form you must remember to sign and date it.*
- For details of the fee and ways to pay please contact the Patent Office.*



**COMPUTER SYSTEMS, IN PARTICULAR VIRTUAL PRIVATE NETWORKS**

This invention relates to computer systems, in particular virtual private networks (VPNs) and especially to a resilient implementation of a VPN.

A VPN is a connection between two "sites" that has the appearance of a dedicated link but which occurs over a shared network, such as the Internet or a direct RAS (Remote Access Service) dial-in connection. Using a technique known as "tunnelling", data packets are transmitted over the shared network in a private "tunnel" between the sites. Tunnelling is the encapsulation of a data packet, for example an IP (Internet Protocol) packet inside another IP packet, after encrypting the data packet. The outer packet has a different destination IP address from the inner one and is used to direct the inner encrypted packet to a VPN security gateway at a site, where the outer layer can be stripped off, the inner packet decrypted and sent to the appropriate one of a number of destinations within the site. If this gateway should fail, no connection to these destinations is possible.

It is an object of the invention to provide means which ensure that full or partial failure of a gateway (for example failure of either one or both of the interfaces onto its connected networks) does not result in such a lack of connection.

According to one aspect of the invention there is provided a computer system comprising a first node connectable to a second node via one of a plurality of third nodes, communications between the first node and the respective third node being encrypted, and further comprising means for selecting a said third node and setting up an encrypted connection between the first node and the selected third node, means for detecting subsequent failure of the selected third node, and means for selecting another third node and setting up an encrypted connection between the first node and the other selected third node.

According to another aspect of the invention there is provided a method of detecting node failure, and connecting to another node, in a computer system comprising a first node connected to a second node via one of a plurality of third nodes, communications between the first node and the

one said third node being encrypted, the method being employed for detecting failure of the one said third node, after authentication and connection of the first node thereto, and for establishing connection of the first node to another of said third nodes, and including steps wherein the first node sends a failure detection signal to the one said third node at a predetermined time, wherein if the one said third node is operational it sends a response to the failure detection signal to the first node, and wherein in the event of the receipt of no said response within a predetermined time interval the first node either establishes a connection with another said third node which was previously authenticated, or attempts to authenticate another said third node and establish connection therewith.

Embodiments of the invention will now be described with reference to the accompanying drawings, in which

Fig.1 illustrates an example embodiment of a conventional VPN network, and

Fig.2 illustrates, schematically, an embodiment of the present invention.

In Fig.1 two computers (nodes) 1, 2 are connected by a communications link 3 comprised for example by a direct RAS dial-in connection or the Internet. The computers 1 and 2 are provided with the appropriate VPN software 1a, 2a so that communications therebetween over link 3 are encrypted, indeed computers 1, 2 and link 3 may be considered to form an encrypted network. The computer 2 is connected via a LAN 4 to three computers (nodes) 5, 6 and 7 which may be personal computers (PCs). Communications between the computers 2, 5, 6 and 7 over LAN 4 are not encrypted. In Figs.1 and 2, encrypted communication is indicated by a thicker line than unencrypted communication. The computer 2 comprises a gateway server which links the encrypted and unencrypted networks. The computers 5, 6 and 7, which may be referred to as target machines, each have a respective IP address, indicated in the drawing as 10.0.0.1, 10.0.0.2 and 10.0.0.3, respectively. The computer 1, which may be a notebook computer, and may be referred to as a client, has an IP address indicated in the drawing as 100.0.0.1, whereas the gateway server 2 has an IP address indicated in the drawing as 200.0.0.254. The policy 1b of the client 1 includes a tunnel setting that indicates for the gateway server 2 which target machines, or

rather their IP addresses, are located behind the gateway server 2. The policy can also include tunnel settings for other gateway server/target machines. The tunnel setting for the illustrated arrangement is as indicated in the drawing (Tunnel1). The arrangement of Fig.1 can employ the software product designated SafeGuard VPN from Utimaco Safeware AG to encrypt the data transfer. In the case of use of SafeGuard VPN and if the tunnel setting applies, GSS (Generic Security Services) key exchange is employed between the client 1 and the gateway 2, instead of between the client 1 and one of the target machines 5, 6, 7. The client and server include IP filters 1c, 2c for extracting data intended for them, or in the case of a gateway server for each target IP address behind it e.g. 10.0.0.1 – 10.0.0.3. In the IP filter for each target address behind gateway 2, a session key for that gateway is used for encryption. The session key is stored in caches 1d and 2d.

In the case of data to be sent from the client machine 1 to the target machine 5, a data packet with a sender address 100.0.0.1 and a receiver address 10.0.0.1 will be encrypted at the client machine 1 and transmitted in another packet, with the sender address 100.0.0.1 but a receiver address 200.0.0.254, to the gateway server 2, where the outer layer is removed, the inner packet decrypted and sent on to target machine 5 unencrypted.

Only one gateway is specified for a given range of IP addresses i.e. target machines. Hence, if gateway 2 fails, no further communication with the LAN 4 behind gateway 2 is possible, unless there is a second gateway (not shown) installed and the policy of the client machine is reconfigured accordingly.

In the case of a second gateway being available, the client 1 has to be able to find a new path behind the gateways at run time without the need for manual reconfiguration. There are two points which have to be considered in order to obtain a fault tolerant system. Firstly, the complete GSS key exchange and session key establishment has to take place with one and the same gateway, it cannot start with one and finish with another, and whilst it is relatively easy to specify a list of gateways in the client's policy 1b that are to be tried one after the other until successful session key establishment, failure of a gateway has to be detected somehow after a session has already been established.

The present invention employs re-authentication to achieve gateway fault tolerance. More than one gateway (node) is defined for a given range of IP addresses. This is referred to as a gateway cluster. In Fig.2 there is shown a cluster of three gateways (nodes) 21, 22, 23. When a session key request is issued by client 1 for an IP address in this given range, means such as a key management service KMS 8 randomly selects one gateway from the cluster, such as 21, and attempts authentication, such as by means of establishing a connection with the chosen gateway and carrying out a key establishment protocol exchange. If the authentication fails, authentication is attempted with the next specified gateway, such as 22, in a round-robin manner. If authentication with all of the gateways 21-23 fails, the key request is rejected.

If authentication is successful, however, the session key generated for that gateway, such as 21, is passed back to the client IP filter 1c and cached both at the client and at the gateway in caches 21d, 1d, respectively, thereby permitting data to be transmitted between the client and gateway and encrypted/decrypted at both. A different session key will be associated with each gateway, so that if data is sent from client 1 to target machine 5, via gateway server 21, but an answer from target machine 5 to client 1 runs over a different gateway server 22, a new session and another session key will need to be established for that gateway/client connection.

To detect failure of a gateway, such as 21, following establishment of a session for the particular client 1 gateway connection (client 1/gateway 21) the client IP filter 1c transmits a failure detection signal, comprising so-called "heartbeat" packets to the gateway 21, or rather the gateway's IP filter 21c which is required to respond to it with an answer. If an answer to such a packet does not arrive at the client IP filter 1c within a predetermined time, such as n seconds, this being configurable, a second failure detection signal is sent by the client IP filter 1c. If there is still no answer, the client IP filter 1c searches to see if there is already a session key established for some other gateway in the cluster to which the defective gateway belongs. If there is already such a key established for another gateway, client IP filter 1c automatically makes use of this other gateway, say 22, instead of the defective one. The session key of the defective gateway 21 is removed from the cache 1d at the client 1. If there is no such established key for another gateway in the cluster, the client IP filter 1c issues a key request to the key management service 8

for some other gateway in the cluster. If this key request fails but the key management service succeeds in the authentication process with another gateway in the cluster, it simply sets the appropriate key and the client IP filter 1c will use it from then on.

To reduce the workload for the gateway, “heartbeat” messages are only sent if there has been a session key established but no packet from this gateway has been received for the last n seconds. As long as there are packets received from the gateway within the above time interval, the gateway is considered to be operational. If the client IP filter has session keys established for more than one gateway in a cluster, heartbeat messages are only sent to the gateway that was being used for communications emanating from the client.

A further reduction of workload, especially for RAS environments can be achieved by configuring the heartbeat as “deferred”, that is the sending out of the heartbeat packet on the client side is deferred until the client has to send IP (payload) packets to the respective gateway anyway. This behaviour prevents any unnecessary connection establishments between the client and the gateway in previously idle times. However, in case of failure of the respective gateway, a certain number of IP payload packets get lost and connection recovery takes longer than otherwise necessary. Both heartbeat modes, instant and deferred, are configurable by a setting in the client’s policy 1b.

Heartbeat messages are encapsulated in the same way as normal communication is configured. This is necessary to allow the packets to be delivered over the same route, for example through a firewall that is configured to let only encrypted packets pass. In the particular case where the “tunnels” are created according to RFC1827, then since at least an ESP (Encapsulating Security Payload) is used in every mode, the heartbeat packet will be detected by having an SPI (Security Parameter Index) of 0x FFF FFFFF. The gateway IP filter will respond to every packet containing such an SPI with an equal packet in the opposite direction. The packet is never decrypted and contains no useful information. Simply the SPI is evaluated.

This solution causes a lot of re-authentication at the remaining gateways, if one fails. To distribute the authentication load, in case of a failure, the key management service KMS 8

randomizes the order of the specified cluster gateways each time it reads it from the policy file 1b and before it passes it to the client IP filter 1c. The client filter 1c itself will search the gateways in a cluster in sequential order.

This randomization will cause a distributed load on the gateways, even if all clients connectable in a particular VPN happen to have identical policies. The randomization of the cluster members may be turned off via a policy setting in cases where a specific order is desired, for example high performance main and low performance backup systems.

If a defective gateway is re-actuated, it will automatically be used once any client initiates an authentication and tries that gateway because it is the next on the list. On the other hand, if communication starts from the gateway, it will establish a new session key with the client, and therefore cause the client to use that gateway again. In particular if the re-actuated gateway is the client's preferred gateway, then the client will start using the gateway once the session key with the gateway is established.

Various aspects of the above will now be described in greater detail. The VPN software as loaded on the clients such as 1 and gateways such as 21, 22, 23 (Fig.2), as indicated at 1a, 21a, 22a, 23a, makes it possible to specify a single tunnel address for a single IP address or a range of addresses. Alternatively instead of a tunnel address, a named Cluster may be defined for a single IP address or range of IP addresses. A named Cluster is defined in the policy within an additional section named CLUSTER. A new statement is supported, consisting of a new keyword (named "cluster") and one or more IP addresses separated by at least one blank. For example,

[CLUSTER]

Cluster 1 = 143.1.0.64 143.1.1.157

Cluster 2 = 143.1.0.63 143.1.0.65 143.1.0.66

The supported syntax of a Policy entry in the new “CLUSTER” section has to be written in the following format:

`'cluster' <nr> '=' <IP address> [ ' <IP address> ]`

Whenever a communication partner (target) is located behind a Gateway Cluster which performs the actual authentication and/or encryption/decryption tasks, the key management service process needs to know the addresses of each possible tunnel of the gateway cluster. If there is only one gateway a tunnel entry can be specified in the usual manner, although a cluster can be defined and then added to the tunnel entry, but if there are two or more gateways, the cluster must be defined and the appropriate cluster added to the tunnel entry instead of a single tunnel address.

The syntax for a single tunnel entry is as follows:

`'Tunnel' <nr> '=' <start address> [ ' - ' <end address> ] ' ' ( <tunnel address> |  
'Cluster' <nr> [ 'AUTO' ]`

The following example of possible policy entries, using the above examples, will clarify the syntax.

[TUNNEL]

Tunnel1 = 143.1.0.24 – 143.1.0.30 Cluster 1

(This means that from the IP address 143.1.0.24 to the IP address 143.1.0.30, every IP address is “tunnelled” by the Cluster 1, thus either gateway 143.1.0.64 or gateway 143.1.1.157 is used to perform the actual authentication and/or encryption/decryption tasks.)

Tunnel2 = 143.1.0.24 – 143.1.0.30 143.1.1.160

(This is also a valid entry which means gateway 143.1.1.160 is used to perform the actual authentication and/or encryption/decryption tasks.)

An automatically detected RAS server address may be redirected to an address or a gateway cluster by the following entry in the tunnel section:

`'Redirect Tunnel'<nr>'=' <server address>' (<tunnel address>|'Cluster' <nr>)`

To distribute the workload, the key management service randomizes the order of the specified gateway addresses for all tunnel entries each time it reads it from the policy and before it passes it to the client IP filter.

To detect the failure of a gateway, the client IP filter sends “heartbeat” packets to the gateway for response by the gateway’s IP filter. If the answer to such a packet does not arrive within n seconds, a second packet is sent. To configure this “response time”, a statement in the GENERAL section of the policy is required:

`'HeartbeatResponseTime'=' <number of seconds>`

If there is no such entry, the default value of the client IP filter is used.

To reduce workload for the gateway, “heartbeat” messages may only be sent if there has been a session key established and no packet from the gateway has been received for the last n seconds. As long as there are packets received from the gateway within the above time interval, the gateway is considered to be operational. If the client filter has session keys established for more than one gateway in a cluster, heartbeat messages are only sent to the gateway that would be being used for communications emanating from the client. To support this functionality there is another new entry in the GENERAL section of the policy:

`'HeartbeatDeferTime'=' <number of seconds>`

If there is no such entry, the default value of the client IP-filter is used.



In order to disable the heartbeat functionality, a further new policy entry in the GENERAL section is required:

‘Heartbeat’=’(NONE|DEFERRED|INSTANT)’

Heartbeat = NONE	disables the heartbeat functionality i.e. no heartbeat packets are sent.
------------------	--

Heartbeat = DEFERRED	defers the sending out of heartbeat packets on the client’s side until the client has sent out IP packets to the respective gateway.
----------------------	--

Heartbeat = INSTANT	the client IP filter sends heartbeat packets to the gateway without any deferment.
---------------------	--

By default, no heartbeat packets are sent.

In summary, the invention provides means or steps for enabling a computer system to continue to connect a first node to a second node via one of a plurality of third nodes, communications between the first and third nodes being encrypted, when the third node fails in use. Failure detection messages are sent and if they are not responded to at the appropriate time, another third node is selected for use. If the latter has not already been authenticated i.e. it is not in a suitable state for encrypted communication, it will first need to be authenticated, and, for example, a respective message encryption key established.

CLAIMS

1. A computer system comprising a first node connectable to a second node via one of a plurality of third nodes, communications between the first node and the respective third node being encrypted, and further comprising means for selecting a said third node and setting up an encrypted connection between the first node and the selected third node, means for detecting subsequent failure of the selected third node, and means for selecting another third node and setting up an encrypted connection between the first node and the other selected third node.
2. A computer system as claimed in claim 1 wherein the first node and the plurality of third nodes form a virtual private network in which communications between the first node and each of the third nodes is encrypted with a respective message encryption key established after an authentication process.
3. A computer system as claimed in claim 2, wherein the means for selecting the third node comprises a key management service which randomly selects a third node from the plurality and attempts to perform a said authentication process therewith upon a request by the first node for a said message encryption key, and wherein upon successful authentication the said message encryption key is generated and cached at the first node and the selected third node.
4. A computer system as claimed in claim 3, wherein the first node and each of the third nodes includes a respective Internet Protocol (IP) filter which comprises said means for detecting third node failure, wherein the IP filter of the first node sends a failure detection signal to the selected third node, wherein the IP filter of the selected third node sends a response to the failure detection signal if the selected third node is operational, wherein in the event of no said response the IP filter of the first node attempts to find another third node of the plurality which is already authenticated, and will use the respective message encryption key for subsequent communications, or if no other third node is already authenticated, the IP filter of the first node issues a request for a message encryption key to

the key management service which attempts to authenticate another third node of the plurality.

5. A computer system as claimed in claim 4, wherein the failure detection signal is transmitted when a respective message encryption key has been established and no communication from the selected third node has been received by the first node within a predetermined time interval.
6. A computer system as claimed in claim 5, wherein when message encryption keys have been established for more than one said third node, the failure detection signal is only sent to the selected third node.
7. A computer system as claimed in claim 5, wherein transmission of the failure detection signal is deferred until after the first node has transmitted encrypted communications to the selected third node.
8. A computer system as claimed in any one of claims 4 to 7, wherein the failure detection signal is encapsulated in the same manner as the communications between the first node and the selected third node are configured, and the response of the selected third node comprises an equal signal in the opposite direction.
9. A computer system as claimed in any one of claims 3 to 8, wherein the key management service randomizes the order of the plurality of third nodes as listed in a policy file of the first node, and the IP filter of the first node searches the randomized list in sequential order when attempting to find another third node for communications therewith.
10. A method of detecting node failure, and connecting to another node, in a computer system comprising a first node connected to a second node via one of a plurality of third nodes, communications between the first node and the one said third node being encrypted, the method being employed for detecting failure of the one said third node, after authentication and connection of the first node thereto, and for establishing connection of the first node to

another of said third nodes, and including steps wherein the first node sends a failure detection signal to the one said third node at a predetermined time, wherein if the one said third node is operational it sends a response to the failure detection signal to the first node, and wherein in the event of the receipt of no said response within a predetermined time interval the first node either establishes a connection with another said third node which was previously authenticated, or attempts to authenticate another said third node and establish connection therewith.

11. A method as claimed in claim 10, wherein the first node and the plurality of third nodes form a virtual private network in which communications between the first node and each of the third nodes is encrypted with a respective message encryption key, and including the step of establishing a respective message encryption key after each said authentication.
12. A method as claimed in claim 11, and including the steps of randomly selecting a third node from the plurality upon a request for a message key by the first node, performing an authentication process with the selected third node, and if successful generating a said message encryption key and caching it at the first node and the selected third node.
13. A method as claimed in claim 12, wherein the failure detection signal is transmitted when a respective message encryption key has been generated and no communication from the selected third node has been received by the first node within the predetermined time interval.
14. A method as claimed in claim 12, wherein when message encryption keys have been established for more than one said third node, the failure detection signal is only sent to the selected third node.
15. A method as claimed in claim 12, wherein transmission of the failure detection signal is deferred until after the first node has transmitted encrypted communications to the selected third node.

16. A computer system substantially as herein described with reference to and as illustrated in Fig.2 of the accompanying drawings.
17. A method of detecting node failure and connecting to another node substantially as herein described with reference to and as illustrated in Fig.2 of the accompanying drawings.

COMPUTER SYSTEMS, IN PARTICULAR VIRTUAL PRIVATE NETWORKS

Abstract

A first node (client) (1) is in communication with one of a plurality of second nodes (5, 6, 7) connected to a local area network (LAN) (4) via a virtual private network including a link (3), such as the Internet, and a selected one of a plurality of third nodes (gateway servers) (21, 22, 23). Communication between the first node (1) and the third nodes (21, 22, 23) is encrypted, whereas communication between the third nodes and the second nodes (5, 6, 7) is unencrypted. Communication from the first node (1) to one of the second nodes (5, 6, 7) is initially set up via a selected one of the third nodes after suitable authentication. If that third node should subsequently fail, an alternative third node can be used. To detect the failure of a third node, the first node (1) sends a "heartbeat" packet (failure detection signal) to it. An operational third node responds with an answer, indicating that all is well. If no answer is received within a predetermined time interval, the first node sends another "heartbeat" packet. If there is still no answer, another third node is selected for use. This other third node can be one that was previously authenticated, or alternatively one that must be authenticated at this time. In order to reduce workload heartbeat messages may only be sent at selected times. (Fig.2)

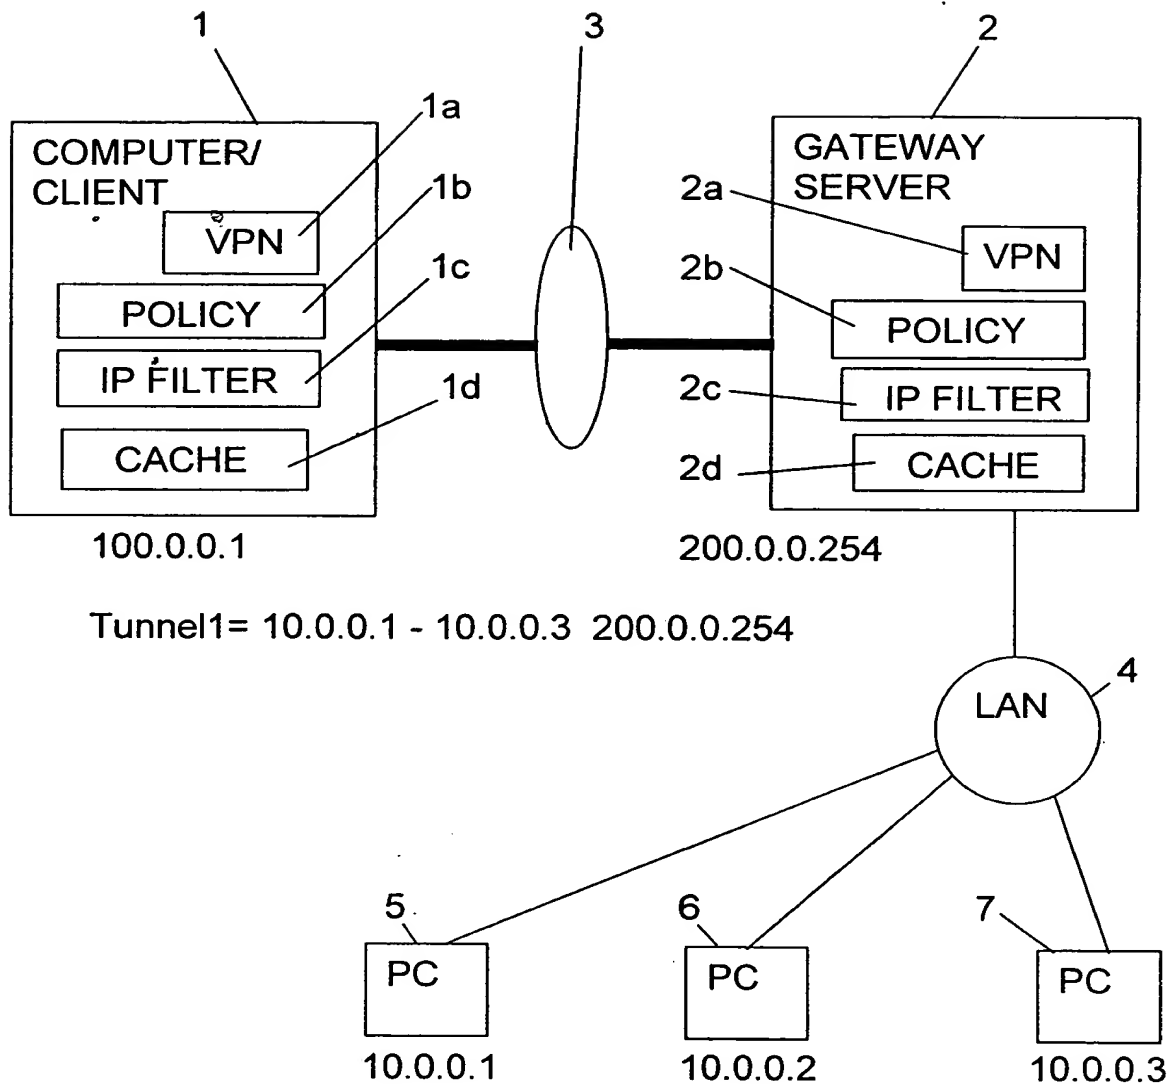


Fig 1

**THIS PAGE BLANK (USPTO)**



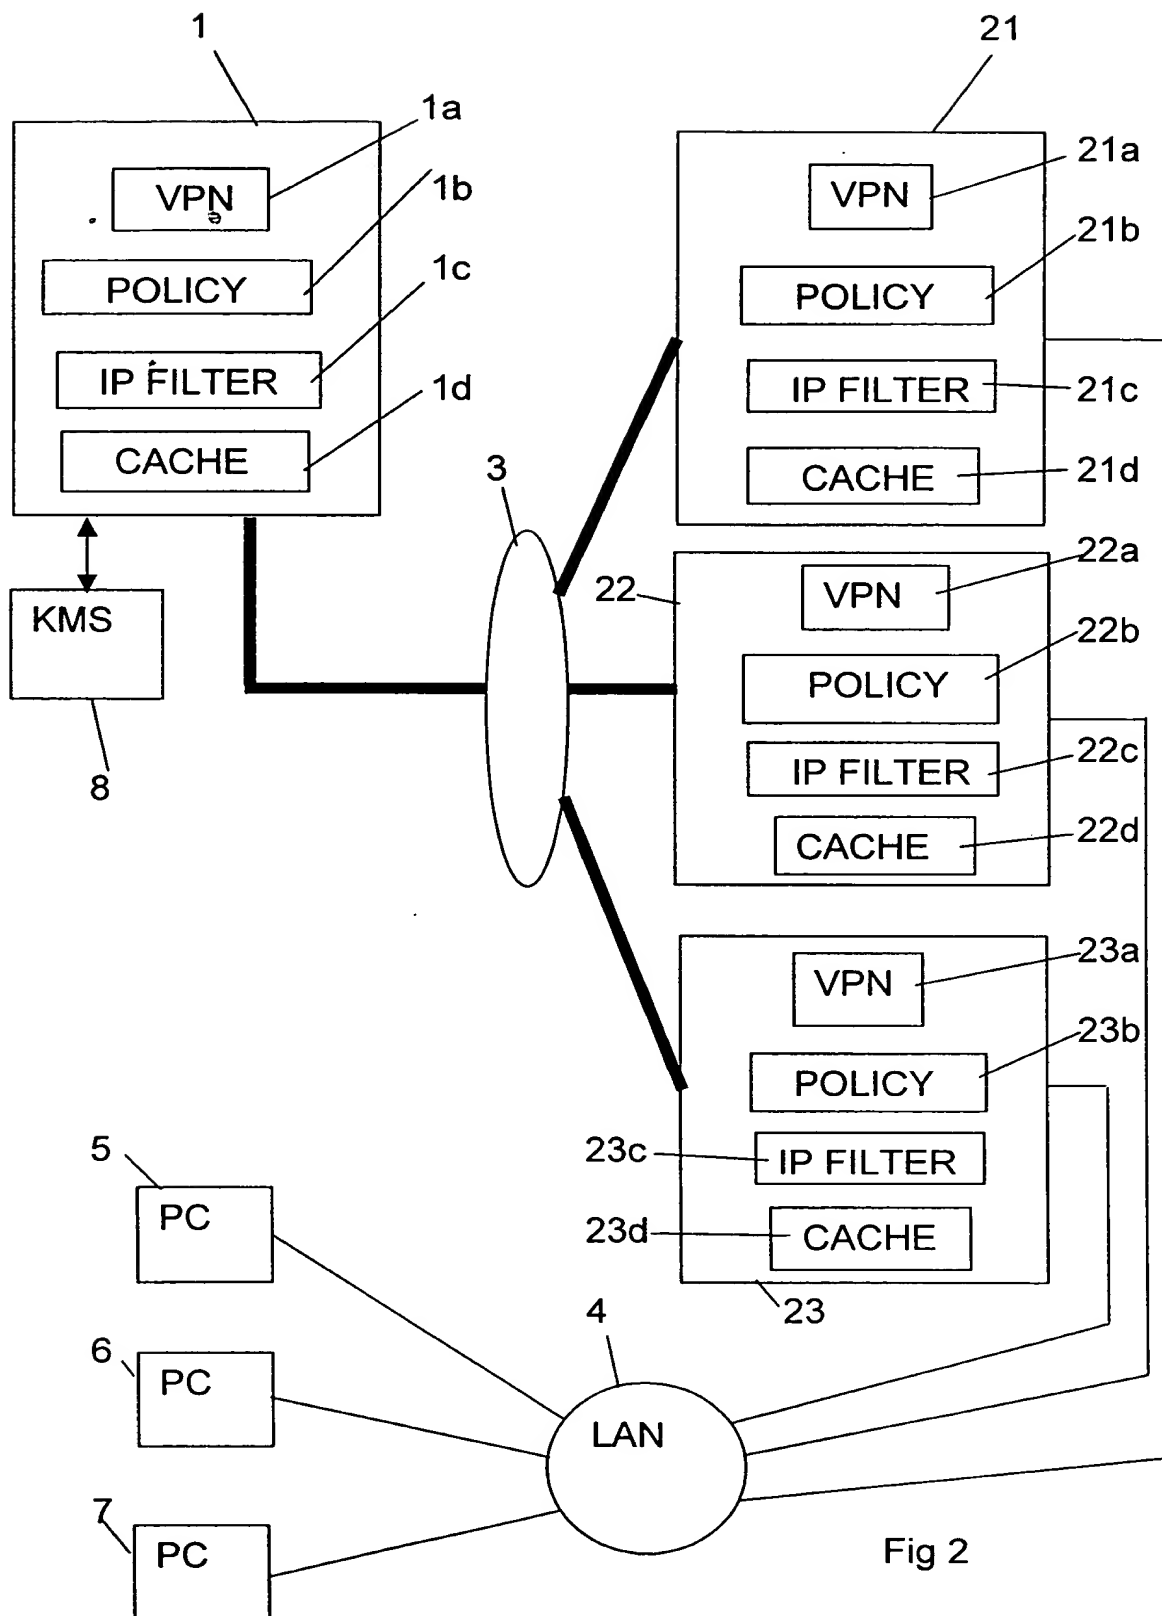


Fig 2

**THIS PAGE BLANK (USPTO)**